

NYLON DOUBLE SPEED CHAIN

STABLE, LOW NOISE, NO POWDER WEAR



PRODUCT ADVANTAGES



FINE WORKMANSHIP



DURABLE



HIGH COST PERFORMANCE



PRODUCTION SAFETY



QUALITY GUARANTEE



AFTER-SALES SERVICE

PRODUCT DETAILS



**LARGE CONVEYING
CAPACITY**

LARGE LOAD

**ACCURATE AND STABLE
TRANSPORTATION**

**SYNCHRONIZED
DELIVERY**




**GOOD PERFORMANCE,
STABLE**


RELIABLE, DURABLE

PRODUCT IN FORMATION

CHAIN NO. BS25-C206B(2.5x speed chain)

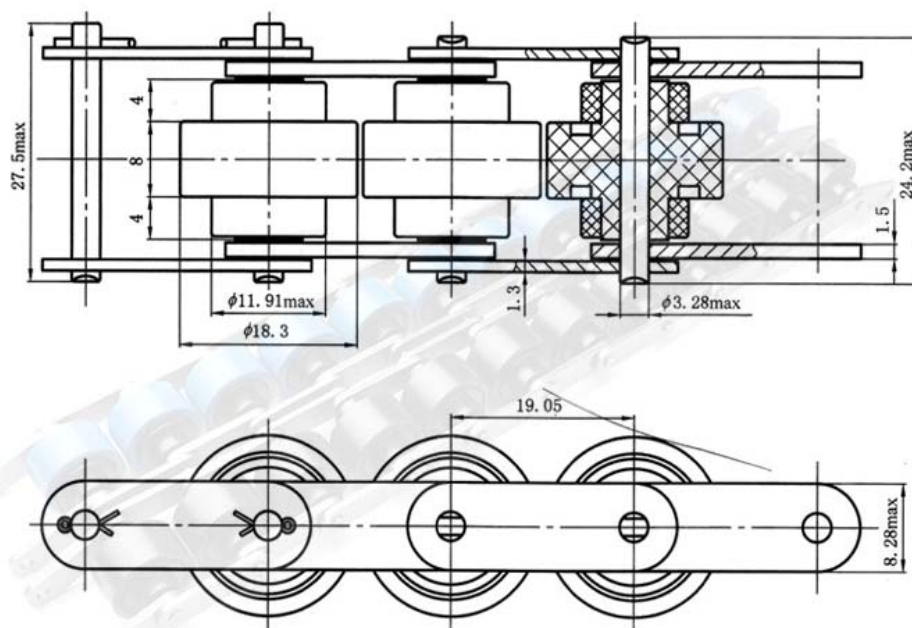

Suitable for BS25-C206B aluminum profile parameters

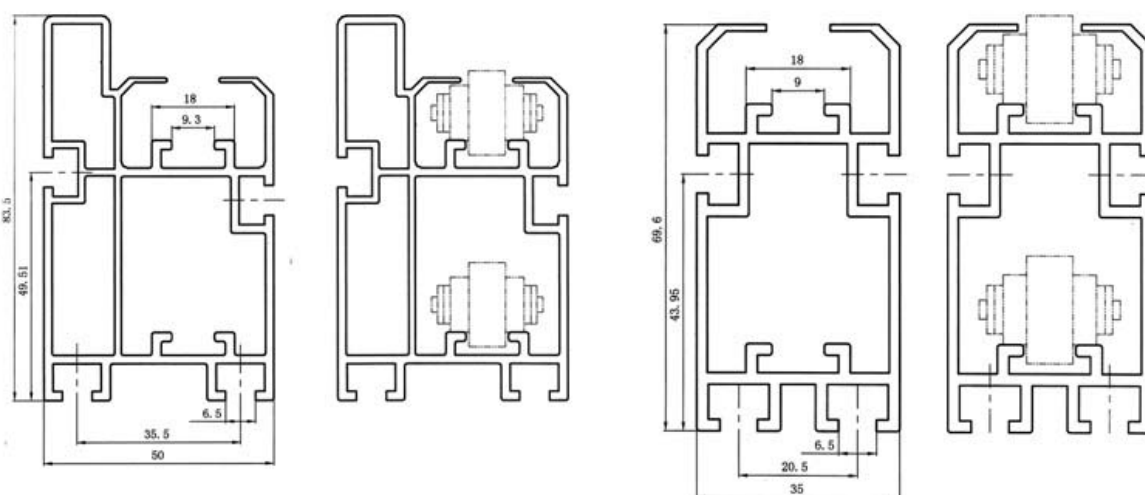

Dimensions of the chains

Ordinal	Chain number	Pitch p	Roller diameter d1 max	Rolling wheel diameter d8 max	Roller depth b1 min	Rolling wheel depth b8 max	Bearing pin body diameter d2 max	Plate depth h2 max	Outer plate thickness b11 max	Inner plate thickness b12 max	Width over bearing pin b4 max	Width over connection pin b7 max
01	BS25-C206B	19.05	11.91	18.3	4	8	3.28	8.28	1.3	1.5	24.2	27.5
02	BS25-C208A	25.4	15.88	24.6	5.7	10.3	3.96	12.07	1.5	2	32.6	36.5
03	BS25-C210A	31.75	19.05	30.6	7.1	13	5.08	15.09	2	2.4	40.2	44.6
04	BS25-C212AS	38.1	22.23	36.6	8.5	15.5	5.94	18.08	3	3	49.0	51.5
05	BS25-C212A	38.1	22.23	36.6	8.5	15.5	7.0	18.08	3	4	51.0	54.0
06	BS25-C216A	50.8	28.58	49	11	21.5	7.92	24.13	4	5	66.2	71.6





PRODUCT DETAILS



**LARGE CONVEYING
CAPACITY**

LARGE LOAD

**ACCURATE AND STABLE
TRANSPORTATION**

**SYNCHRONIZED
DELIVERY**




**GOOD PERFORMANCE,
STABLE**


RELIABLE, DURABLE

PRODUCT IN FORMATION

CHAIN NO. BS30-C212A(3.0x speed chain)


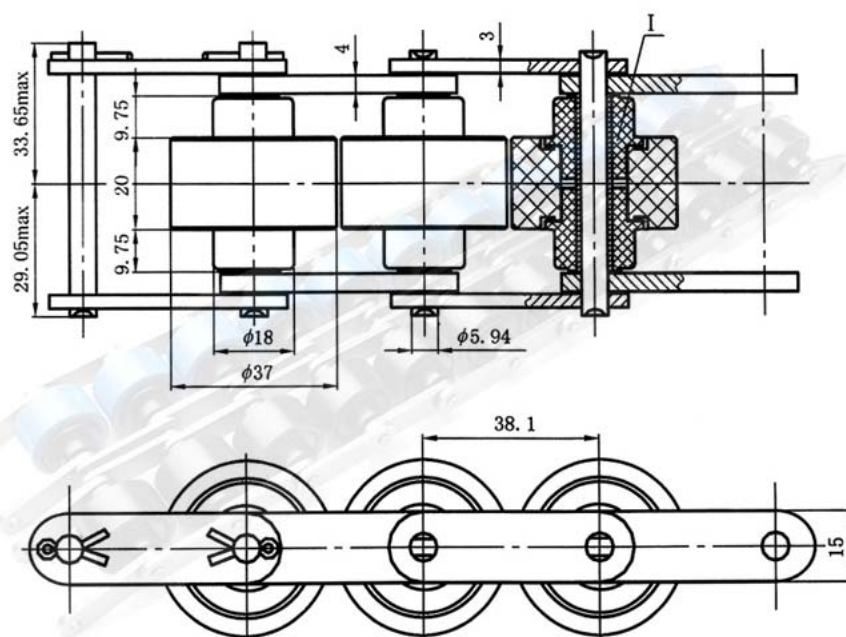


Suitable for BS30-C212 BS10-212A(3.0) aluminum profile parameters

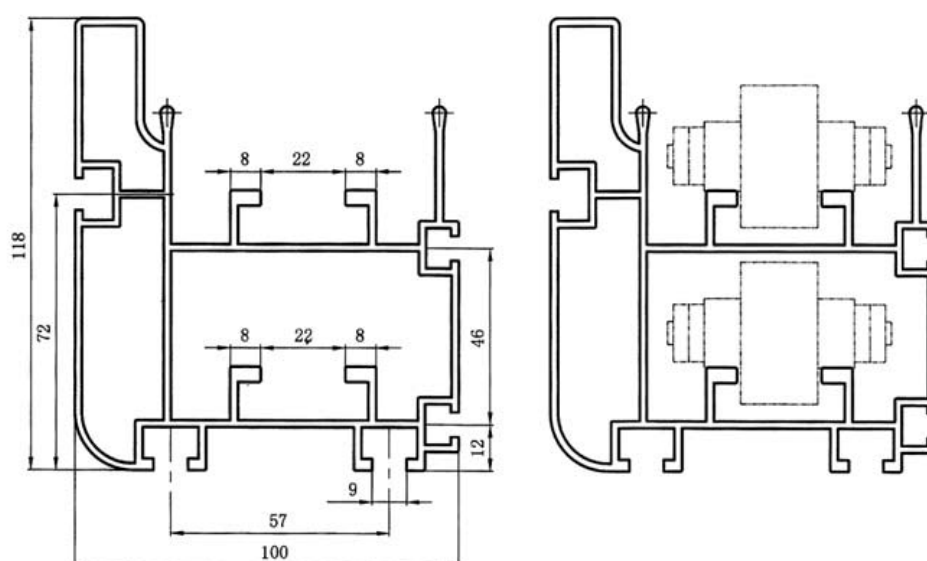

Chain number	Pitch p	Number of teeth z	Pitch-circle diameter d	Tip diameter da max	Absolute shroud diameter dg max	Tooth width bfl max	Width over tooth bf2 max	Depth of tooth side round h	Tooth side radius rx
	mm		mm						
BS30-C206B	19.05	9	55.7	62.5	33	3	14.9	4.8	10
		10	61.65	69	38				
BS30-C208A	25.4	9	74.26	83.5	45	4.3	20.2	6.4	13
		10	82.2	92.5	52				
BS30-C210A	31.75	9	92.83	104.5	57	5.3	25.3	7.9	16
		10	102.75	116	67				
BS30-C212A	38.1	9	111.4	125.5	69	6.4	30.2	9.5	20
		10	123.3	139	80				
BS30-C212A	50.8	9	148.53	167.4	93	8.3	40.5	12.7	26
		10	164.39	186	108				
BS30-C216A	38.1	9	111.4	125.5	69	7.3	36.7	9.5	20
		10	123.3	139	80				

Necessary Sprockets Of Speed-fold Conveyor Chains

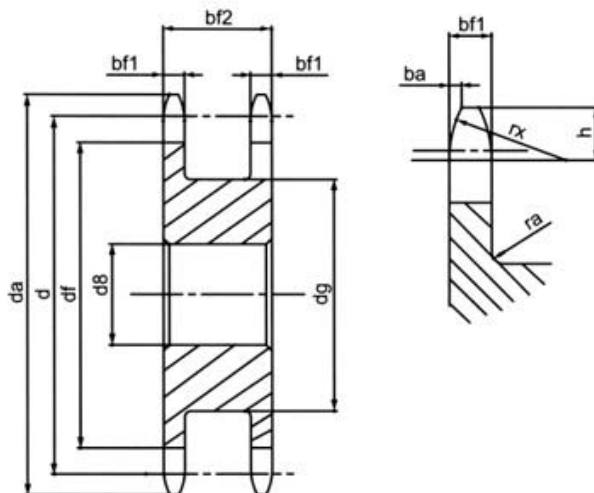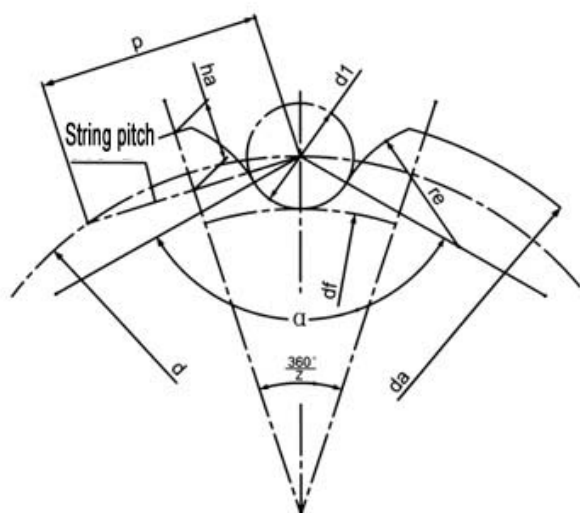



PRODUCT DETAILS



**LARGE CONVEYING
CAPACITY**

HEAVY LOAD

**ACCURATE AND
STABLE DELIVERY**

**SYNCHRONIZED
DELIVERY**




**GOOD PERFORMANCE
AND STABILITY**

**RELIABLE AND
DURABLE**







PRODUCT INFORMATION

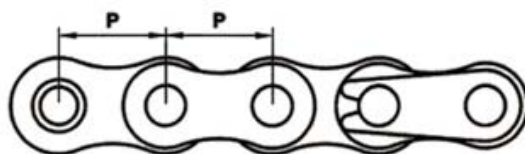


ONE-SIDED LONG PIN D

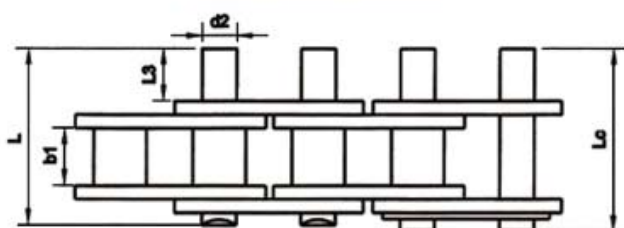

DOUBLE-SIDED LONG PIN E

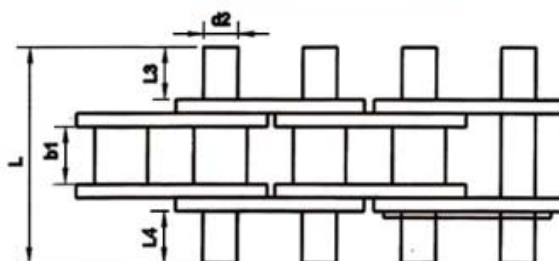


Chain No.	Chain No.	P mm	b1 mm	d2 mm	D Type			E Type		
					L3 mm	L mm	Lc mm	L3 mm	L4 mm	L mm
35	06C	9.525	4.77	3.58	X	11.3+X	12.1+X	X	Y	10+X+Y
40	08A	12.7	7.85	3.96	X	15.6+X	16.7+X	X	Y	13.8+X+Y
50	10A	15.875	9.4	5.08	X	19.4+X	21.2+X	X	Y	17.4+X+Y
60	12A	19.05	12.57	5.94	X	24.3+X	26.3+X	X	Y	22.3+X+Y
80	16A	25.4	15.75	7.92	X	31.2+X	34.2+X	X	Y	28.8+X+Y
100	20A	31.75	18.9	9.53	X	38+X	42.3+X	X	Y	35+X+Y
120	24A	38.1	25.22	11.1	X	47.8+X	51.8+X	X	Y	44.5+X+Y
140	28A	44.45	25.22	12.7	X	51.5+X	56.1+X	X	Y	47.7+X+Y
160	32A	50.8	31.55	14.27	X	61.5+X	66.3+X	X	Y	57.2+X+Y
	06B	9.525	5.72	3.28	X	11.9+X	12.9+X	X	Y	10.9+X+Y
	08B	12.7	7.75	4.45	X	15.6+X	17.1+X	X	Y	14.2+X+Y
	10B	15.875	9.65	5.08	X	18.2+X	19.6+X	X	Y	16.5+X+Y
	12B	19.05	11.68	5.72	X	21.1+X	22.8+X	X	Y	19.1+X+Y
	16B	25.4	17.02	8.28	X	33.9+X	35.2+X	X	Y	31.6+X+Y
	20B	31.75	19.56	10.19	X	38.9+X	42.6+X	X	Y	35.6+X+Y
	24B	38.1	25.4	14.63	X	50.7+X	55.1+X	X	Y	47+X+Y
	28B	44.45	30.99	15.9	X	62.1+X	66.5+X	X	Y	58+X+Y
	32B	50.8	30.99	17.81	X	62+X	67+X	X	Y	57+X+Y

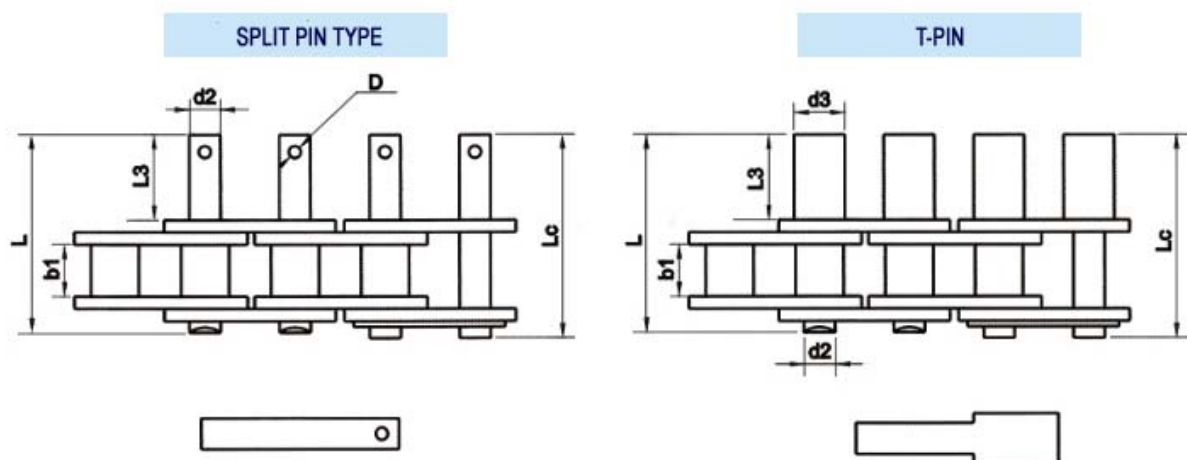


Chain No.	Chain No.	P	b1	d2	L3	L	Lc	K Type D	T Type d3
		mm	mm	mm	mm	mm	mm	mm	mm
35	06C	9.525	4.77	3.58	X	11.3+X	12.1+X	1.3	Y
40	08A	12.7	7.85	3.96	X	15.6+X	16.7+X	1.5	Y
50	10A	15.875	9.4	5.08	X	19.4+X	21.2+X	1.5	Y
60	12A	19.05	12.57	5.94	X	24.3+X	26.3+X	2	Y
80	16A	25.4	15.75	7.92	X	31.2+X	34.2+X	2	Y
100	20A	31.75	18.9	9.53	X	38+X	42.3+X	2.5	Y
120	24A	38.1	25.22	11.1	X	47.8+X	51.8+X	2.5	Y
140	28A	44.45	25.22	12.7	X	51.5+X	56.1+X	3	Y
160	32A	50.8	31.55	14.27	X	61.5+X	66.3+X	3	Y
	06B	9.525	5.72	3.28	X	11.9+X	12.9+X	1.3	Y
	08B	12.7	7.75	4.45	X	15.6+X	17.1+X	1.5	Y
	10B	15.875	9.65	5.08	X	18.2+X	19.6+X	1.5	Y
	12B	19.05	11.68	5.72	X	21.1+X	22.8+X	2	Y
	16B	25.4	17.02	8.28	X	33.9+X	35.2+X	2	Y
	20B	31.75	19.56	10.19	X	38.9+X	42.6+X	2.5	Y
	24B	38.1	25.4	14.63	X	50.7+X	55.1+X	2.5	Y
	28B	44.45	30.99	15.9	X	62.1+X	66.5+X	3	Y
	32B	50.8	30.99	17.81	X	62+X	67+X	3	Y


SPLIT PIN TYPE K Type

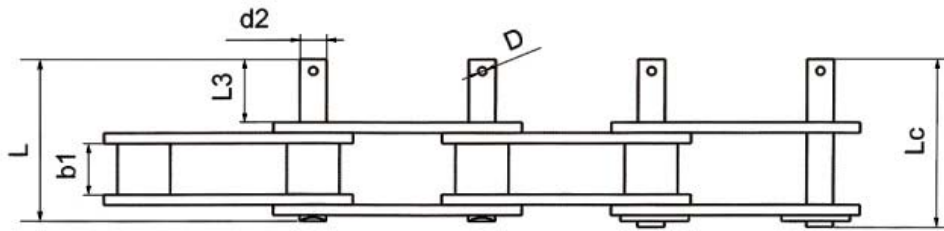

T-PIN T Type

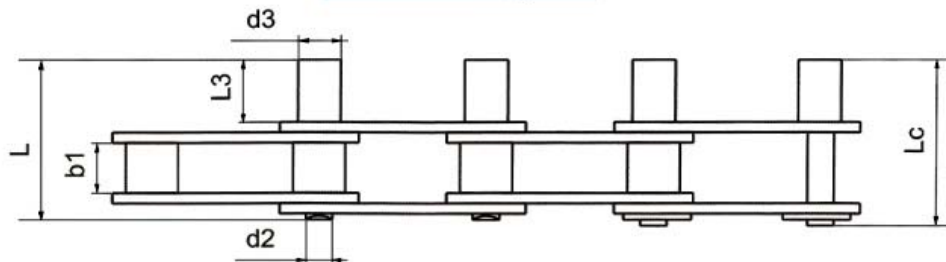

MIDDLE HOLE LONG PINS F Type

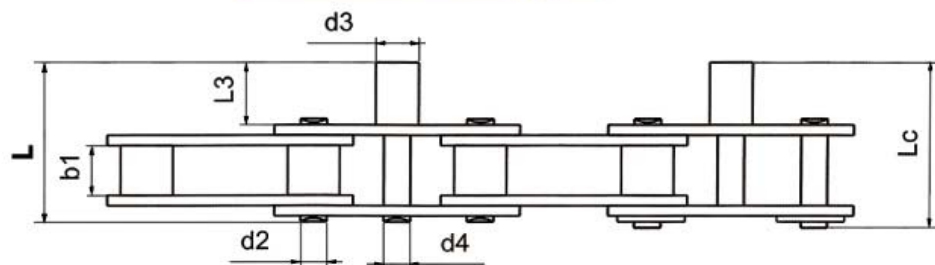

Chain No.	Chain No.	P	b1	d2	L3	L	Lc	K Type	T Type	F Type	
		mm	mm	mm	mm	mm	mm	D	L4	d3	d4
C208A	C2040	25.4	7.85	3.96	X	15.6+X	16.7+X	1.5	Y	Z	6/7
C208AL	C2042										
C210A	C2050	31.75	9.4	5.08	X	19.4+X	21.2+X	1.5	Y	Z	7
C210AL	C2052										
C212A	C2060	38.1	12.57	5.94	X	24.3+X	26.3+X	2	Y	Z	8
C212AL	C2062										
C212AH	C2060H	38.1	12.57	5.94	X	27.7+X	29.5+X	2	Y	Z	8
C212AHL	C2062H										
C216A	C2080	50.8	15.75	7.92	X	31.2+X	34.2+X	2.5	Y	Z	10.5
C216AL	C2082										
C216AH	C2080H	50.8	15.75	7.92	X	34.4+X	35.9+X	2.5	Y	Z	10.5
C216AHL	C2082H										
C220A	C2100	63.5	18.9	9.53	X	38+X	42.3+X	3	Y	Z	10
C220AH	C2102										

* NOTE: XY CAN BE ANY VALUE

Application field - easy to deal with

Multiple specifications, can be customized



Automated assembly line



Electronics Industry



Textile industry



Logistic Industry



Automobile industry



Food Industry